


# ZAYER

## XIOS G 1500 (N° 56.657)

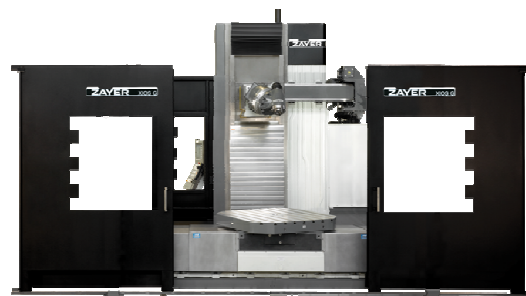

Centro de mecanizado de bancada fija con mesa giratoria  
Bed type machining center with rotary table

### CARACTERÍSTICAS TÉCNICAS TECHNICAL SPECIFICATIONS

Mesa giratoria Rotary table	mm	1500 x 1500
Recorrido longitudinal Longitudinal travel	mm	2500
Recorrido transversal Cross travel	mm	1500
Recorrido vertical Vertical travel	mm	1600
Distancia min-máx. de la mesa a la nariz del cabezal Minimum - max. distance from table to spindle nose	mm	1545
Avance de trabajo Working feed	mm/min	hasta / up 15000
Avance rápido Rapid feed	mm/min	30000
Cabezal Head		45°, 360.000 posiciones 45°, 360.000 positions
Potencia Power	kW	32
Velocidad de giro del cabezal Speed of the spindle head	min <sup>-1</sup>	6000
Almacén de herramientas Tool magazine		30
Equipo refrigeración Coolant equipment		Dos bombas de 14 y 5 bar, 1000 l Two pumps of 14 and 5 bar, 1000 l
Extractor de virutas Chip conveyor		2 extractores de virutas de cuello cisne 2 goose neck chip conveyor
CNC		Heidenhain iTNC 530 HSCI